


BAR COATER

Bar Coater is used for clay coating on Duplex Board minimum 6-8 gram coating.

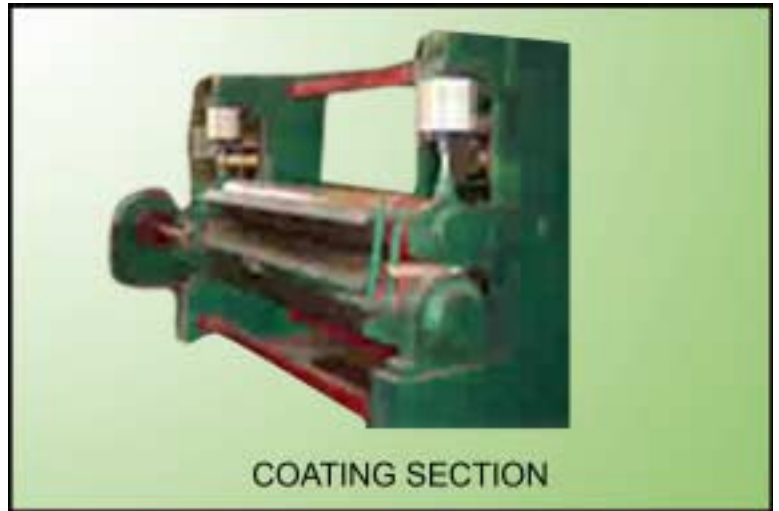

Technical Specifications:

- **Metering Bar Coater:** one number is used for coating.
- **Applicator Roll :** Ø165 with suitable face length.
- **Metering Rod:** Ø 10 mm up to 2500 mm face and above 2500 mm face -rod Ø 16 mm. The metering rod is made out of 5.0-5.5 thick material chrome plated, ground Surface finish & fixed with plastic holder, called rod bed (special design) shall have water circulation system for cleaning the rod in running condition. The plastic holder called rod bed is fixed in 5.0-5.5 Holder.
- **Jack System :** The complete unit is fixed on fabricated frame and two nos or jack is fitted at both the end for lowering and lifting of the whole unit. Both the jacks are connected by connecting red couplings and fitted with bearings & plummer blocks.
- **Paper Lead Rolls:** Suitable nos of paper lead roll (Six nos.) are manufactured.
- **Drive:** D.C. Motor of 2 HP that can drive the roll clockwise or anticlockwise.
- **Control Panel:** Control panel for both A.C & D.C motors. Panel with regulators & Indicators.

Global
Paper Machinery & Engg. Co.



www.globalpapermachine.com

Global Paper Machinery & Engg. Co.

82, Ganga Sagar Scheme, 200 Feet Bypass,
Sirsi Road, Jaipur-302021

Tel: +91-141-5179040, 2470290, Fax: +91-141-5179040

Email: sales@globalpapermachine.com